


# PNT 200 HE

## ON LIGHT VEHICLE



Working height

The PNT 200HE stands out for its simplicity and reliability, offering a particularly optimised total cost of ownership (TCO). Designed with a single outreach and a single stabilisation mode, it minimises electronic components while ensuring high performance.

With a working height of 20 metres and an outreach of 8.2 metres, it perfectly meets the needs of professionals seeking both efficiency and cost-effectiveness. Its four stabilisers, including two extendable ones at the front, provide excellent stability without compromising ease of use. Designed to combine profitability, safety, and efficiency, the PNT 200HE is an ideal solution for those who prioritise simplicity without compromising performance.


### SPECIFICATIONS



20m



8.2m




18m



360°



230kg



4 outriggers  
including 2  
extendable at  
the front



125 x 75  
x 110cm



Hour  
counter



≤ 3,5T



# ARTICULATED AERIAL PLATFORM


## ON CHASSIS

### POSSIBLE TYPES OF VEHICLES


- IVECO DAILY
- ISUZU M21

*For vehicle options, please contact us before ordering.*

### WORKING DIAGRAM

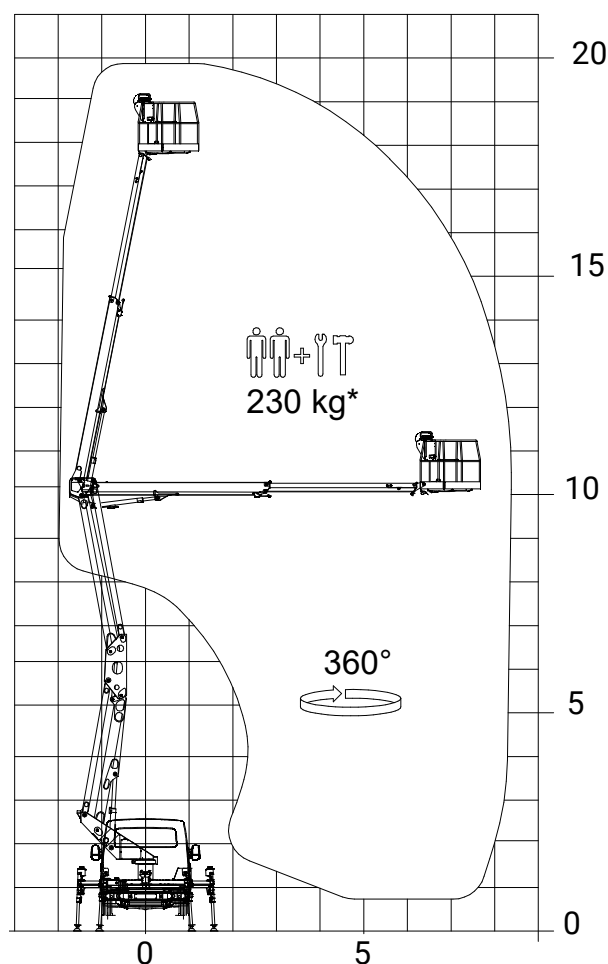

### VEHICLE DRAWING

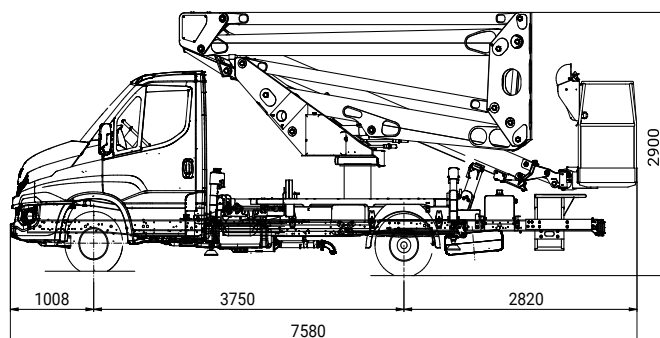

### STANDARD SPECIFICATIONS

- Engine stop/start in nacelle
- Hour meter
- Emergency circuit on manual pump
- Proportional controls on all movements
- Secure access to work platform
- 220 V circuit in nacelle
- Conveyor chain for hoses inside the mast for optimum protection
- Rigid PVC protection for overhead controls
- Four H-shaped stabilisers, two of which are extendable at the front

### OPTIONS

- Signage (tri-flash, 2 flashing lights, stripes)
- Low-voltage insulated basket or tubular aluminium
- Boxes
- Aluminium side panel
- Tool holder in basket
- Green Pack

*For more platform options, please contact us before ordering.*



Demonstration  
on demand