


Mobiele torenkraan 60 m SK1265-AT6 eLift

modus rijden: diesel
hijzen: elektrisch / hybride

net aansluiting van 1A tot 32A

HIJSTABEL Afstempeling 7,95 m x 7,66 m (centermaten)

Giek horizontaal		HAAKHOOGTE 25,2 / 35 m (HOOGTE ONDER DE GIEK 27,4 / 37,2 m)																								
																Vlucht (m)										
3,5		13,2	15	20	25	30	35	40	45	50	55	60														
10000		9335	7985	6965	6170	5530	5000	4560	4190	3870	3590	3350	3130	2940	2770	2615	2475	2345	2230	2125	2025	1935	1850	1775	1700	Last (kg)
		10000	8610	7445	6545	5830	5255	4775	4370	4025	3725	3465	3235	3035	2855	2690	2545	2410	2290	2175	2075	1980	1890	1810	1735	
Giek 30° getopt																Haakhoogte (m)										
3,5																46,2	48,5	51,35	54,25	57,15	60	62,9	64,2			
																				Vlucht (m)						
5000		21	25	30	35	40	45	50	52,2																	
		4740	4285	3905	3580	3305	3065	2855	2665	2500	2350	2220	2095	1985	1885	1795	1700									Last (kg)
		5000	4500	4085	3735	3440	3180	2955	2755	2580	2425	2285	2155	2040	1935	1840	1750									

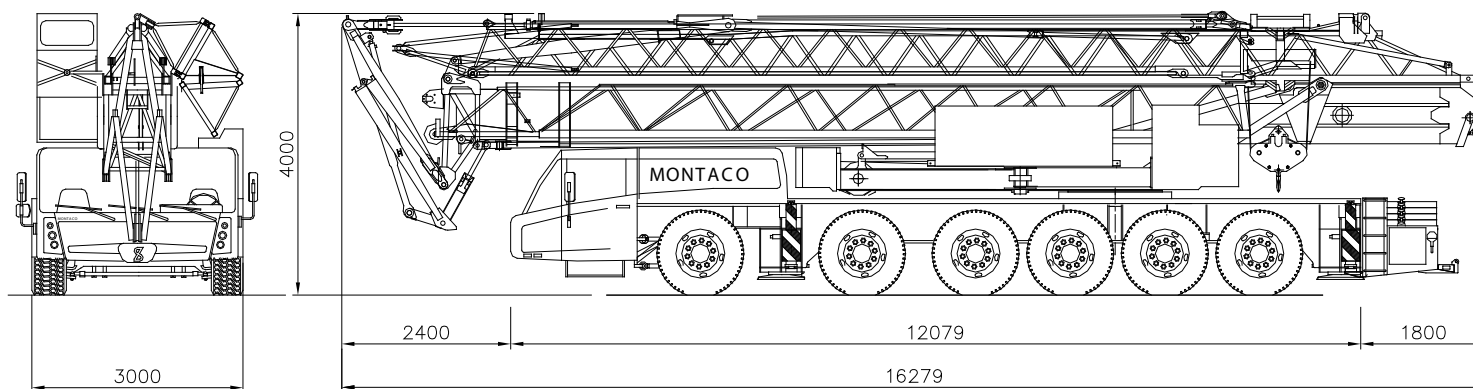

Mobiele torenkraan 60 m SK1265-AT6 eLift

